
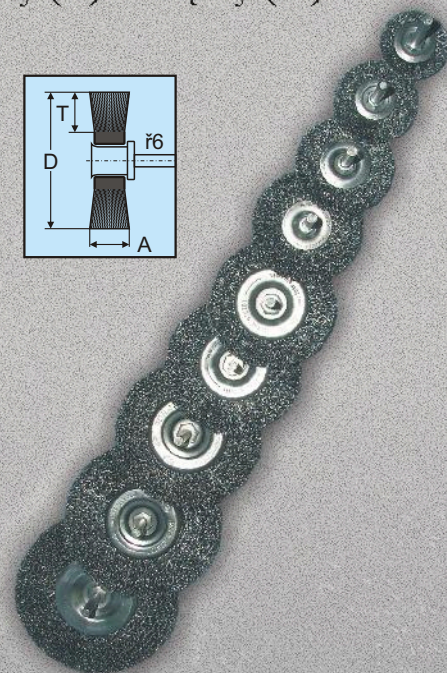


## SZCZOTKI TARCZOWE z TRZPIENIEM 6 mm

Drut stalowy (S) kwasoodporny (K) mosiężny (M)


Numer katalogowy	D [mm]	A [mm]	T [mm]	max [obr./min]
TT 30	30	8	5	8.000
TT 40	40	8	8	8.000
TT 50	50	10	12	8.000
TT 60	60	12	15	8.000
TT 70	70	12	20	8.000
TT 80	80	20	20	8.000
TT 90	90	20	25	8.000
TT 100	100	20	25	4.500
TT 110	110	20	25	4.500
TT 120	120	22	30	4.500
TT 130	130	22	32	4.500
TT 140	140	22	32	4.500
TT 150	150	22	35	4.500



## SZCZOTKI DOCZOŁOWE z TRZPIENIEM 6 mm



Drut stalowy (S) kwasoodporny (K) mosiężny (M)

Numer katalogowy	D [mm]	T [mm]	K [mm]	max [obr./min]
DT 30	30	15	30	8.000
DT 40	40	15	30	8.000
DT 50	50	20	30	8.000
DT 60	60	22	55	8.000
DT 70	70	25	55	8.000
DT 80	80	25	65	8.000
DT 100	100	28	80	8.000



## WYCIORY KOMINIARSKIE

Drut stalowy (S),  
kwasoodporny (K)

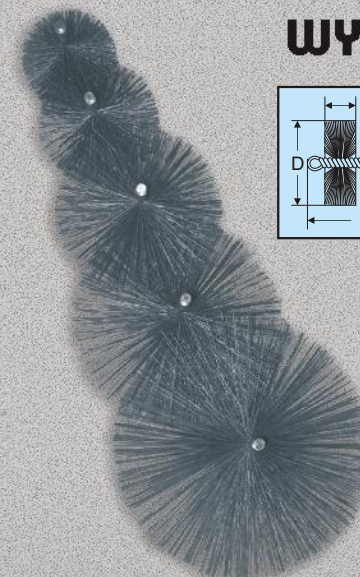

Numer katalogowy	D [mm]	A [mm]	L [mm]
W-150	150	80	150
W-175	175	80	150
W-200	200	80	150
W-250	250	80	150
W-350	350	80	150
W-400	400	80	150

## OPRAWA WYCIORA C.O.



Numer katalogowy	L [mm]
OW-500	500
OW-700	700
OW-1000	1000
OW-1250	1250
OW-1500	1500

## TARCZE SPAWALNICZE

TS-1  
TSM-2  
TSM-3

