


SZCZOTKI RĘCZNE w OPRAWIE DREWNIANEJ


Drut stalowy (S), kwasoodporny (K), mosiężny (M)




Numer katalogowy	L [mm]	A [mm]	T [mm]	B [mm]
R-3	270	130	30	15
R-3M	145	50	30	15
R-4	270	130	30	25
R-5	270	130	30	30
R-5M	270	130	30	30
R-5K	270	130	30	30
R-6	270	130	30	35

WYCIORY do CENTRALNEGO OGRZEWANIA

Drut stalowy (S),
kwasoodporny (K)




Numer katalogowy	D [mm]	A [mm]	L [mm]
W-20	20	90	150
W-30	30	90	150
W-40	40	90	150
W-50	50	90	150
W-60	60	90	150
W-70	70	90	150
W-80	80	90	150
W-90	90	90	150
W-100	100	90	150
W-110	110	90	150
W-120	120	90	150
W-130	130	90	150
W-140	140	90	150

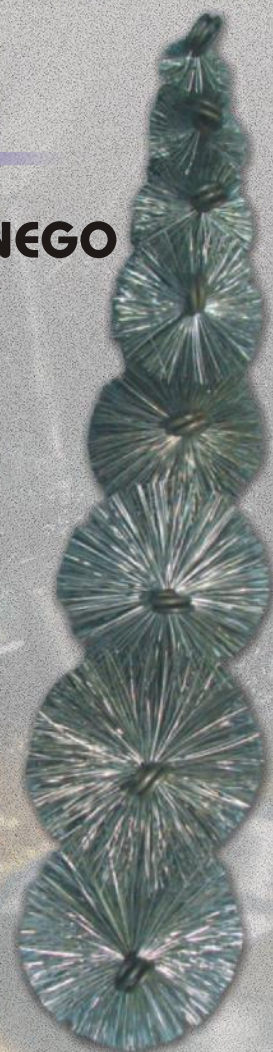

SZCZOTKI TARCZOWE z OTWOREM


Drut stalowy (S), kwasoodporny (K), mosiężny (M)



Numer katalogowy	D [mm]	A [mm]	T [mm]	max [obr./min]
TO 30	30	8	12	8.000
TO 40	40	8	12	8.000
TO 50	50	8	15	8.000
TO 60	60	10	15	8.000
TO 70	70	10	20	8.000
TO 80	80	22	22	8.000
TO 90	90	22	22	8.000
TO 100	100	22	22	4.500
TO 110	110	22	22	4.500
TO 120	120	22	30	4.500
TO 130	130	22	30	4.500
TO 140	140	22	30	4.500
TO 150	150	22	35	4.500
TO 150	150	32	35	4.500
TO 175	175	32	35	3.600
TO 200	200	32	40	3.600
TO 250	250	32	45	3.600

SZCZOTKI DOCZOŁOWE z GWINTEM M-14

Drut stalowy (S), kwasoodporny (K), mosiężny (M)



Numer katalogowy	D [mm]	T [mm]	K [mm]	max [obr./min]
DG 60	60	22	50	12.000
DG 70	70	25	55	12.000
DG 80	80	25	62	12.000
DG 100	100	35	80	8.500